

DURAFLEX EN SERIES




Duraflex EN Series Expansion Tanks

Flat vessels for wall hung boiler applications


Performance Data

| Model | Capacity litres | Pressure Maximum kPa | Pressure Pre-set kPa | Weight kg |
|-------|--------------------|----------------------------|----------------------------|--------------|
| EN8 | 8 | 300 | 100 | 2.5 |
| EN12 | 12 | 300 | 100 | 4.0 |
| EN18 | 18 | 300 | 100 | 4.6 |
| EN25 | 25 | 300 | 100 | 5.8 |
| EN35 | 35 | 300 | 100 | 7.3 |
| EN50 | 50 | 600 | 100 | 8.6 |
| EN80 | 80 | 600 | 100 | 15.6 |

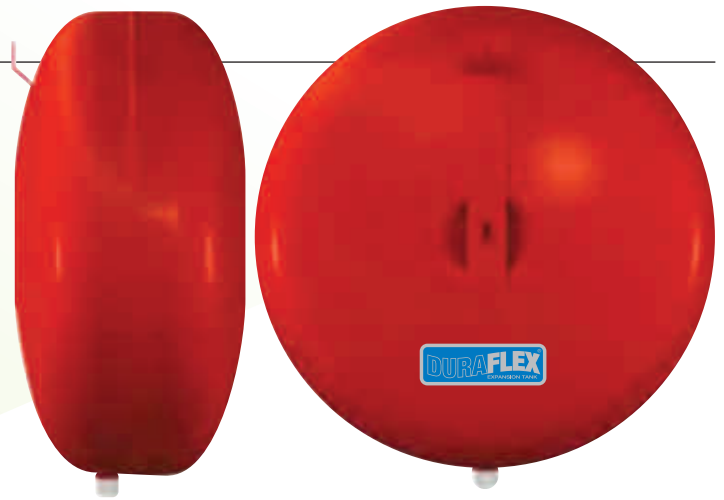

Dimensional Data

| Model | øD mm | H mm | L mm | B mm | C BSP |
|-------|----------|---------|---------|---------|----------|
| EN8 | 280 | 287 | 163 | 52 | 1/2 |
| EN12 | 354 | 361 | 168 | 64 | 1/2 |
| EN18 | 354 | 367 | 222 | 76 | 3/4 |
| EN25 | 409 | 419 | 239 | 93 | 3/4 |
| EN35 | 480 | 457 | 240 | 97 | 3/4 |
| EN50 | 480 | 457 | 317 | 125 | 3/4 |
| EN80 | 634 | 612 | 325 | 135 | 3/4 |

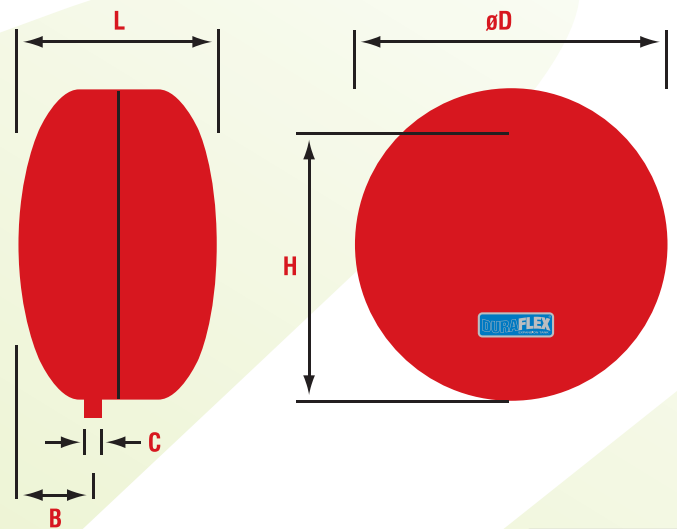

BENEFITS

- Non-replaceable diaphragm
- Maximum operating temperature 70°C
- Available in red durable powder coat finish
- Pre-set pressure 100kPa (Nitrogen)
- Complete with wall mounting brackets

Note: For sizing calculations please phone 1800 337 959

Automatic Heating reserves the right to change specifications without notice.

